

Size(L \times W \times H): 30 mm \times 30 mm \times 3.2 mm Weight: 6.6q

Features

GPS, BDS, GLONASS, Galileo, QZSS, IRNSS, SBAS

Support L-Band and PPP

Support INS+GNSS navigation

Surface-mounted design and small size to integrate

High-performance floating-point arithmetic

Industry-leading low power consumption

Internal adaptive anti-interference algorithm

K803 GNSS Module

Easy Integration

30mm×30mm×3.2mm size module with surface-mounted design makes K803 modules ideal for users to integrate. The power consumption is lower to 0.95W.

In-built Newly Quantum III SoC chip

The K803 incorporates ComNav's new generation high-accuracy Quantum III SoC chip with the capability of tracking all the GNSS constellations and signals. It can provide users with highly reliable positioning information with support of high-performance floating point arithmetic.

Onboard IMU for reliable navigation

With up to 20Hz IMU data update rate and inertial navigation fusion algorithm, K803 can provide continuous and high-quality positioning data in the harsh environments such as tunnels, buildings and forests.

Adaptive Anti-interference Technology

The K803 has internal adaptive anti-interference algorithm which enables the module effectively suppress wideband, narrowband and continuous-wave interference. It can provide users with high-quality observing data even in the complex electromagnetic environment.



K803 GNSS Module

| Signal Tracking | |
|-----------------|--------------------------------------------------------|
| Channels | 965 |
| BeiDou | BDS-2: B1I, B2I, B3I BDS-3: B1I, B3I, B1C, B2a, B2b |
| GPS | L1C/A, L2P, L2C, L5, L1C |
| GLONASS | G1, G2, G3* |
| GALILEO | E1, E5b, E5a, E5 AltBoC, E6c1 |
| QZSS* | L1C/A, L2C, L5, L1C |
| SBAS* | L1C/A, L5 |
| IRNSS* | L5 |
| L-Band*2 | |

| Performance Specifica | ations |
|----------------------------|--------------------------------------------|
| Cold start | < 20 s (Adding Acceleration Capture Module |
| Hot Start (with RTC) | < 10 s (Typical) |
| RTK Initialization time | < 5 s (D<10km) |
| Signal reacquisition | < 1 s |
| Initialization reliability | > 99.9% |
| Velocity accuracy | ≤ 0.02 m/s |
| Acceleration | 4 g |
| Overload | 15 g |
| Time accuracy | 20 ns |

| Positioning Specificatio | ns |
|--------------------------|---------------------------|
| Post Processing | 2.5 mm + 1 ppm Horizontal |
| | 5 mm + 1 ppm Vertical |
| Single Baseline RTK | 8 mm + 1 ppm Horizontal |
| | 15 mm + 1 ppm Vertical |
| DGPS | <0.4 m RMS |
| SBAS | 1 m 3D RMS |
| Standalone | 1.5m 3D RMS |

| Communications | |
|----------------|-----------------|
| UART | x4 |
| PPS | x1 |
| EVENT | x2 |
| SPI | x1 ³ |

| IMU* (Optional) | |
|-----------------|--------------------------------------------------------------------------------------------------|
| Gyroscope* | Measurement ranges: ±125°/s Zero-biased stability: 10°/h Angular random walk: 0.3°/sqrt(h) |
| Accelerometer* | Measurement ranges: ±4g Biase instability: 70ug Velocity random walk: 0.16m/s/sgrt(h) |

| Data Format | |
|----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Correction data I/O | RTCM2X,3X,CMR(GPSonly),CMR+(GPSonly) |
| Position data output | -ASCII: NMEA-0183 GGA, GSA, GSV, RMC, HDT, VHD, ZDA, VTG, GST, GLL; PTNL, PJK; PTNL, AVR; PTNL, GGK -ComNav Binary -Position data output rate: 1 Hz, 2 Hz, 5 Hz, 10 Hz,20Hz* |

| Antenna Interface | |
|---------------------|---------------------------------------|
| Impedance Match | Wiring 50 Ω impedance matching |
| LNA Power: External | +3.3V ~ +5V ± 5%VDC @ 0-100mA |
| LNA Gain | 20 ~ 35dB (suggested) |
| Physical | |
| Size (L × W × H) | 30 mm × 30 mm × 3.2 mm |
| Hardware interface | LGA 82 pin |
| Weight | 6.6g |
| Environmental | |
| Working temperature | -40 °C to + 85 °C |
| Storage temperature | -55 °C to + 95 °C |
| | |

| Electrical | |
|-------------------|-------------------------------|
| Input voltage | +3.3 V ± 5% DC |
| Power consumption | 0.95W (Anti-interference off) |

| input voitage | +3.3 V ± 5% DC |
|-------------------|-------------------------------|
| Power consumption | 0.95W (Anti-interference off) |
| | |

| Comnav Compass Receiver Utility software | |
|------------------------------------------|--|
| Compass Solution software | |
| | |


| Optional Accessories |
|------------------------|
| AT-series GNSS antenna |
| 5m/10m RF Cables |
| Evaluation Kit |
| Card version |

- 1. E5 AltBOC is reserved for future upgrade.
- 2. L-Band is optional.

Software

3. SPI is reserved, support customization.

Note:Items marked with *are only support by specific firmware

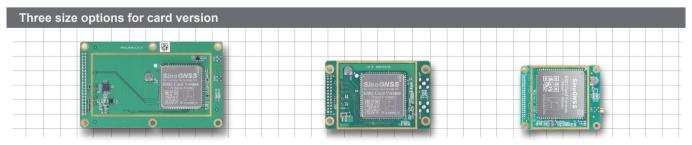

60*100 mm (pin to pin with K708)

46*71 mm (pin to pin with K706)

50*40mm (pin to pin with K705)



ComNav Technology Ltd.

Web: www.comnavtech.com Email: sales@comnavtech.com

Tel: +86 21 64056796 Fax: +86 21 54309582