


# K825 GNSS Module

K Series GNSS Module

Ver.2025.2.18

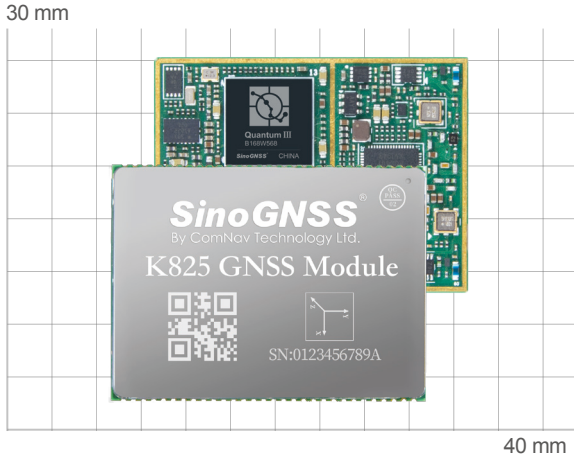

**Size**(L × W × H): 30 mm × 40 mm × 3.2 mm

**Weight:** 10g

# K825 GNSS Module

## Easy Integration

The K825 module is a 30mm×40mm×3.2mm module with surface-mounted design. It is ideal for users to integrate. The power consumption is lower to 1.6W .

## In built newly Quantum III SoC chip

The K825 incorporates ComNav's new generation high-accuracy Quantum III SoC chip with the capability of tracking all the GNSS constellations and signals. It can provide users with highly reliable positioning information with support of high-performance floating point arithmetic.

## Onboard IMU for reliable navigation

With up to 20HZ IMU data update rate and inertial navigation fusion algorithm, K825 can provide continuous and high-quality positioning data in the harsh environments such as tunnels, buildings and forests.

## Adaptive Anti-interference Technology

The K825 has internal adaptive anti-interference algorithm which enables the module effectively suppress wideband, narrowband and continuous-wave interference. It can provide users with high-quality observing data even in the complex electromagnetic environment.

## Features

Dual-antenna Design for Robust Heading and Positioning

BeiDou Global Signal BDS-2, BDS-3

Support L-Band and PPP

Support INS+GNSS navigation

Surface-mounted design and small size to integrate

High-performance floating-point arithmetic

Industry-leading low power consumption

Internal adaptive anti-interference algorithm

**SinoGNSS**<sup>®</sup>  
By ComNav Technology Ltd.

# K825 GNSS Module

K Series GNSS Module

Ver.2025.2.18

## Signal Tracking

|                     |                                |
|---------------------|--------------------------------|
| GPS                 | L1C/A, L2P,L2C,L5              |
| BDS-2               | B1I, B2I, B3I                  |
| BDS-3               | B1I, B3I,B1C,B2a, B2b          |
| GLONASS             | G1, G2, G3*                    |
| Galileo             | E1, E5b, E5a, E5 AltBoC*, E6c* |
| QZSS                | L1C/A, L2C,L5,L1C*             |
| SBAS                | L1C/A                          |
| IRNSS               | L5*                            |
| L-Band <sup>1</sup> |                                |

## Performance Specifications

|                            |           |
|----------------------------|-----------|
| Cold start                 | <30 s     |
| Hot start                  | <10 s     |
| RTK Initialization time    | <5 s      |
| Signal reacquisition       | <1 s      |
| Initialization reliability | >99.9%    |
| Velocity accuracy          | ≤0.02 m/s |
| Acceleration               | 4 g       |
| Overload                   | 15 g      |
| Time accuracy              | 20 ns     |

## Heading Specifications

Azimuth: (0.15/R)<sup>o2</sup>

Roll or Pitch: (0.3/R)<sup>o</sup>

## Positioning Specifications

|                     |                                                    |
|---------------------|----------------------------------------------------|
| Post Processing     | 2.5 mm + 1 ppm Horizontal<br>5 mm + 1 ppm Vertical |
| Single Baseline RTK | 8 mm + 1 ppm Horizontal<br>15 mm + 1 ppm Vertical  |
| DGPS                | <0.4 m RMS                                         |
| SBAS                | 1 m 3D RMS                                         |
| Standalone          | 1.5m 3D RMS                                        |

## Communications

- 3 LVTTTL ports
- 1 SPI<sup>3</sup>
- 2 Event Marker input
- 1 Pulse Per Second (PPS) output
- 3 indicator pins show the working status

1. L-Band is optional.
2. R(meter) is the length of two GNSS antennas.
3. SPI is reserved, support customization.
4. One size option for card version: 46\*71 mm (pin to pin with K726).

## Data Format

|                      |                                                                                                                                                                                   |
|----------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Correction data I/O  | RTCM2X,3X,CMR(GPS only),CMR+(GPS only)                                                                                                                                            |
| Position data output | -ASCII: NMEA-0183 GGA, GSA, GSV, RMC, HDT, VHD, ZDA, VTG, GST, GLL; PTNL, PJK; PTNL, AVR; PTNL, GKG<br>-ComNav Binary<br>-Position data output rate: 1 Hz, 2 Hz, 5 Hz, 10 Hz,20Hz |

## Antenna Interface

|                     |                                |
|---------------------|--------------------------------|
| Impedance Matching  | Wiring 50 Ω impedance matching |
| LNA Power: External | +3.3V ~ +5V ± 5%VDC @ 0-100mA  |
| LNA Gain            | 20 ~ 40dB (suggested)          |

## Physical

|                    |                        |
|--------------------|------------------------|
| Size (L × W × H)   | 30 mm × 40 mm × 3.2 mm |
| Hardware interface | LGA 60 pin             |
| Weight             | 10 g                   |

## Environmental

|                     |                   |
|---------------------|-------------------|
| Working temperature | -40 °C to + 85 °C |
| Storage temperature | -55 °C to + 95 °C |

## Electrical

|                   |                               |
|-------------------|-------------------------------|
| Input voltage     | +3.3 V ± 5% DC                |
| Power consumption | 1.6 W (Anti-interference off) |

## Software

- ComNav Compass Receiver Utility software
- Compass Solution software

## Optional Accessories

- AT-series GNSS antenna
- 5m/10m RF Cables
- Evaluation Kit
- Card version<sup>4</sup>

